


The Monitran racking systems have been designed to be compatible with all 6000 series signal conditioning modules. They are available with either a universal AC input or an option of powering the rack from 12 or 24 volts DC. The full width rack MTN/6000 takes a maximum of twelve conditioning modules plus a display module, whereas the reduced width rack MTN/6050 will take only four modules plus a display module. Blanking panels are available for unoccupied slots.

## MTN/6000 SERIES

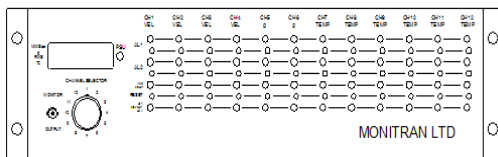

## Applications


- Shut down protection
- Standard rack format
- Fully wired
- 240V or Dc

## Technical

Type	3U height 19" rack conforming to IEC 297-3	
Number of Modules	MTN/6000:	up to twelve and a display module
	MTN/6050:	up to four and a display module

Wall Mounting	Industrial housing sealed to IP65 to fit MTN/6000 order MTN/HE3 (metal)
	Industrial housing sealed to IP65 to fit MTN/6500 order MTN/6050/65 (plastic)

## MTN/6050 SERIES

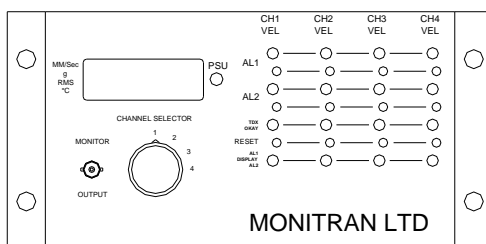

Power supply	85 to 264 AC Volts	
Fuse Rating	5A anti-surge	
Mains connection	IEC mains connector	
Temperature	0 to 70°C	
Module Connector	Din 41612, 64 way connector	
Aperture	MTN/6000:	450 x 135 mm
	MTN/6050:	238 x 135 mm

